



083600/CLO  
BuyLine 32688

# COMMERCIAL DOORS

UPWARD ACTING SECTIONAL DOORS & OPERATORS



**1-800-526-4301**



## PRODUCT SELECTOR CHART

### Insulated Thermally Broken

#### Steel Doors (Polyurethane Insulation)

Description	Model Number	Steel Skin	Steel Thickness	Std. Max. Width	Std. Max. Height
1-3/8" Ribbed	3715	27	.016"	18'2"	16'0"
1-3/4" Ribbed	3717	27	.016"	24'2"	20'0"
1-3/4" Flush	3718	27	.016"	24'2"	20'0"
2" Ribbed	3720	27	.016"	24'2"	20'0"
2" Flush	3722	20	.034"	24'2"	20'0"

### Insulated Thermally Broken

#### Steel Doors (Polystyrene Insulation)

Description	Model Number	Steel Skin	Steel Thickness	Std. Max. Width	Std. Max. Height
1-3/8" Ribbed	3150	27 ga.	.016"	16'2"	16'0"
2" Ribbed	3200	24 ga.	.022"	26'2"	20'0"
2" Flush	3220	20 ga.	.034"	26'2"	20'0"
3" Ribbed	3300	25 ga.	.019"	28'2"	20'0"

### Insulated Thermally Broken

#### Raised Panel/Flush (Polystyrene Insulation)

Description	Model Number	Steel Skin	Steel Thickness	Std. Max. Width	Std. Max. Height
1-3/8" Raised Panel	3154	27 ga.	.016"	16'2"	16'0"
1-3/8" Flush	3155	27 ga.	.016"	16'2"	16'0"
2" Raised Panel	3203	24 ga.	.022"	20'2"	16'0"
2" Flush	3201	24 ga.	.022"	20'2"	16'0"

### Ribbed Steel Doors (No Insulation)

Description	Model Number	Steel Skin	Steel Thickness	Std. Max. Width	Std. Max. Height
2" Standard	525	25 ga.	.019"	20'2"	16'0"
2" Heavy-Duty	524	24 ga.	.022"	24'2"	20'0"
2" Premium	520	20 ga.	.034"	26'2"	20'0"

### Ribbed Steel Door (Polystyrene Insulation)\*

Description	Model Number	Steel Skin	Steel Thickness	Std. Max. Width	Std. Max. Height
2" Standard	525S	25 ga.	.019"	20'2"	16'0"
2" Heavy-Duty	524S	24 ga.	.022"	24'2"	20'0"
2" Premium	520S	20 ga.	.034"	26'2"	20'0"

### Raised Panel Steel Doors

Description	Model Number	Steel Skin	Steel Thickness	Std. Max. Width	Std. Max. Height
2" Standard	692	24 ga.	.022"	20'2"	16'0"
2" Insulated	652V	24 ga.	.022"	20'2"	16'0"

### Full View Aluminum Door

Description	Model Number	Steel Skin	Steel Thickness	Std. Max. Width	Std. Max. Height
2" Premium	902			24'2"	20'0"

### Sheet Roll-up Doors

Description	Model Number	Steel Skin	Steel Thickness	Std. Max. Width	Std. Max. Height
Mini Warehouse	150C	26 ga.		12'	14'
Light-Duty	156C	26 ga.		12'	14'
Medium-Duty	155C	26 ga.		12'	14'
Heavy-Duty	160C	26 ga.		18'	18'
Windload	160CW6	26 ga.		18'	18'

\* Insulated Doors available with hair cell polystyrene (vinyl) back cover. Vinyl backer is designated by substituting a "V" for the final "S" in the model number.

For example, Model 525V.

For complete specifications please refer to Clopay Application & Design Manual.

# CLOPAY COMMERCIAL DOORS

## Why Clopay?

Heavy-duty upward acting sectional doors, including insulated, pan, full view and sheet roll-up models, are ideal for a wide variety of commercial, industrial and institutional projects. Long-lasting, dependable service makes Clopay® sectional doors an economical choice, while the many customized options available enable you to meet virtually any application requirement.



## 3700 Series

### Premium Thermally Broken Steel Doors

Climate control. Durability. Dependability. Our premier Model 3700 Series has it all, providing excellent temperature control, energy efficiency and long-lasting service for a wide range of applications, such as firehouses, warehouses and municipal buildings.



- "Sandwich" construction – foamed-in-place 1-3/8", 1-3/4" or 2" polyurethane core, with steel backer plates on the inner skin – provides maximum strength and energy efficiency inside and out
- Tongue-and-groove section joint for exceptional strength and thermal sealing
- Our three-stage prepainting process assures a durable, maintenance-free finish inside and out

- Attractive stucco-embossed steel skins
- Foamed-in-place polyurethane (3720 and 3722 R-value: 17.2, U-value: .058), (3717 and 3718 R-value: 15.05, U-value: .066), (3715 R-value: 12.9, U-value: .077) – (calculated values)
- Door includes hardware, track and springs
- Ten-year paint and delamination warranty

## 3000 Series

### Thermally Broken Steel Doors

These high quality, insulated thermally broken steel doors provide energy efficiency and long service under demanding conditions. Ideal for use in municipal buildings, warehouses and shipping dock applications, or where maximum energy efficiency is needed.



- R-value up to 12.15, U-value up to .08 remains stable over life of door
- Attractive stucco-embossed, textured skin (3150, 3200, 3220 and 3300)
- Aesthetic raised panel design featuring woodgrain embossing (3154 and 3203)
- Prepainted inside and out for a durable, maintenance-free finish
- Ten-year warranty against rust-through



# LEADING WITH INNOVATION AND EXCELLENCE



## 500 Series Ribbed Steel Doors

Premium-duty 20 gauge (520 and 520S) and heavy-duty 24 gauge (524, 524V and 524S) doors are for most commercial and industrial applications. Models 525, 525V and 525S are alternatives for applications requiring economy and reliability in a lighter gauge commercial door. Ideal for use in service stations, auto dealerships and warehouses.



- Clopay's 20, 24 and 25 gauge steel sectional doors are pre-painted inside and out for a maintenance-free, durable finish
- Tog-L-Loc® construction eliminates welds and rivets for rust-proof and leakproof joints
- Available in prepainted White or Brown
- Available with insulation for maximum energy efficiency
- Ten-year warranty against rust-through
- Available with prepainted, full view light section(s)

## 900 Series Premium Full View Aluminum Door

Standard exterior and "partitioned" interior applications such as service stations, auto dealerships and restaurants that require high light transmission and visibility are satisfied by our durable and attractive Model 902.



- Unique "capped rail" construction for superior weather sealing
- Integral reinforcing fin adds durability and strength
- Standard finishes include White or Brown prepainted, or Clear, anodized aluminum
- Popular Black or Bronze anodized finish available
- Many glazing options available, including thermal glass and polycarbonate panels in various colors

## Coiling Sheet Roll-up Doors

Clopay's sheet roll-up doors are an economical alternative to sectional doors in self storage, maintenance sheds and terminal applications.




Manufactured from durable roll-formed galvanized steel.

- 150C - Mini Warehouse
- 156C - Light-duty Commercial
- 155C - Medium-duty Commercial
- 160C - Heavy-duty Commercial

Also available in WINDCODE® models.

## Break-Away Bottom Section

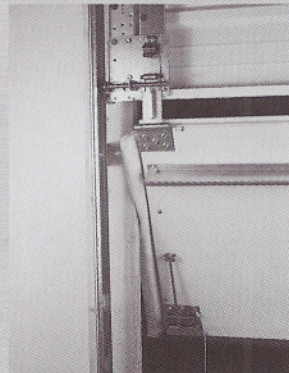

Inside View

Clopay's Break-Away Bottom Section will release from the track and swing up to a full 90 degree angle inward or outward, preventing further damage to the door. The bottom section can be "snapped" back into place in less than a minute. These sections are available on the 1-3/4" and 2" thick 3000 Series polystyrene and polyurethane insulated products, and the 524 and 520 Series ribbed steel doors. Available in Single and Double section break-away options.

## Sliding Door System

- Pre-engineered, pre-cut sliding door system
- Sizes available up to 52' wide by 24' high
- Sealed needle bearings promote longevity and ease of door travel
- Quick, easy, on-site Tek screw assembly



## Commercial Motor Operators

CHAMBERLAIN®  
**LiftMaster**  
PROFESSIONAL

- Model MT Medium-duty Trolley Operator
- Model T Heavy-duty Trolley Operator
- Model MJ and MH Medium-duty Jackshaft Operators
- Model GT Gear Driven Trolley Operator
- Model J and Model H Belt-Drive Jackshaft Operators
- Model GH Gearhead Jackshaft Operator







# TRACK & FRAMING DETAILS




## Standard Radius




## Low Headroom Front Mount




## Low Headroom Rear Mount





## High Lift

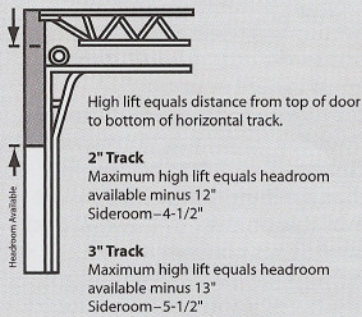

## Roof Pitch




## Vertical Lift




### EXHAUST PORT

Can be cut into any type sectional door.



### DOUBLE END HINGE

Standard on large doors. Optional on small doors.



### SPRING BUMPERS


Standard on high lift and vertical lift tracks. Optional on standard radius and low headroom tracks.




**Full View Aluminum Sash**  
(Various glazing options available)



**24" x 12" Polypropylene Frame Window**  
(Double Strength or Insulated Glass)



**24" x 8" Polypropylene Frame Window**  
(Double Strength or Insulated Glass)



**Long Life Springs**  
25,000; 50,000; or 100,000 cycle springs available.

**Clopay Building Products Architectural Application and Design Manual** provides a comprehensive resource of information necessary to specify any of our sectional doors and operators.

## WINDCODE®

Clopay has been at the forefront of code compliant sectional door products for decades. From research and development to design assistance, Clopay is your source for WINDCODE® products. Clopay offers a variety of wind-loaded products in many different sizes and pressure ratings. Our continued emphasis on this important issue puts Clopay ahead of the competition. Some of the benefits we can offer you include:

- Professional engineering staff
- Design recommendations
- In-house testing facilities
- Third-party independent testing verifications
- Construction industry approvals: South Florida, Standard Building Code Congress, Texas Department of Insurance, North Carolina Building Code Council
- In-house research and development at Clopay Building Products' Technical Center in Cincinnati
- Dedicated building code product manager on staff

## DISTRIBUTED BY:

*Klatt Equipment, Inc.*

P.O. BOX 100118

CUDAHY (MILWAUKEE), WI 53110

(414) 769-7676 FAX: (414) 769-7651

(800) 769-7626



See us in Sweet's  
CDI/CAD Online Catalog Files



©2008 Clopay Building Products Company  
8585 Duke Boulevard  
Mason, OH 45040-3101  
A Griffon Company

For more information on these and other Clopay products, call 1-800-526-4301 or visit our web site at <http://www.clopaycommercial.com>

Printed in U.S.A.  
CMDC-SWEETS-03\_REV1108  
Specifications subject to change without notice.